


Molded Case Circuit Breaker


BM100-FTD 1P




Dimensions

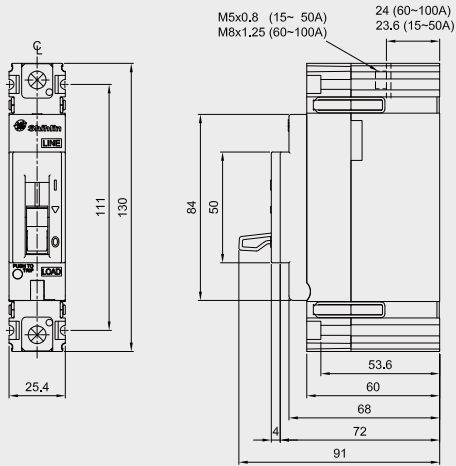

Drilling plan

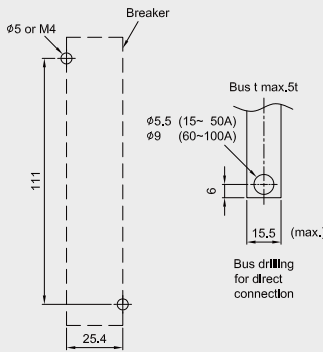

Front-plate cutout

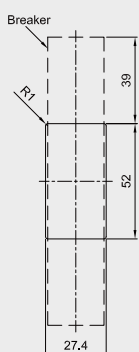

Model	BM100		
Type	FTD		
Rated current I_n (A) at ambient temp. 40°C	15, 20, 30, 40, 50 60, 75, 100		
Frequency	50/60Hz		
Number of poles	1P		
Rated insulation voltage U_i (V)	690		
Rated impulse withstand voltage U_{imp} (kV)	6		
Rated service breaking capacity I_{cu} / I_{cs} (kA)	AC	415/380V 240/220V 130/110V	5 / 5 25 / 13 50 / 25
	DC	125V	10 / 5
Endurance (C-O cycles)	Mechanical	8,500	
	Electrical	1,500	
Dimension D x H x W (mm)	68 x 130 x 25.4		
Standard	IEC/EN60947-2		

